

3-WAY BALL VALVE "SECURITY"

Security
3-way ball valve



The **3-way ball valve "Security"** is part of the Hidroten valve range and stands out for its versatility and its ability to adapt to different hydraulic configurations and applications.

Available in **T-port** and **L-port** configurations, it allows different flow diversion and distribution functions according to the installation requirements.

Features


- PVC-U valve.
- Fully machined internal components for optimum operation.
- Threaded seal holder for operating torque adjustment.
- PTFE ball seats and EPDM seals/FPM option.
- Ball configuration in "L" and "T".
- Position indicator on handle and stem.
- Ergonomic handle with triple function: trigger with open position indication, safety lock and operating torque adjustment.
- Direct subsequent motorization by means of an adapter with ISO 5211 mounting interface.
- Manual, motorized and pneumatic actuation.

Applications

Main applications in the following sectors:


- Industry, water treatment systems, agriculture and swimming pools.

PRESSURE / TEMPERATURE

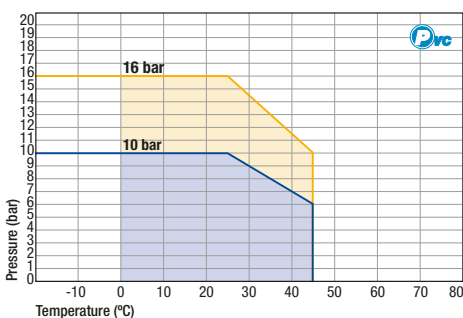


LOAD LOSS


"L" Model

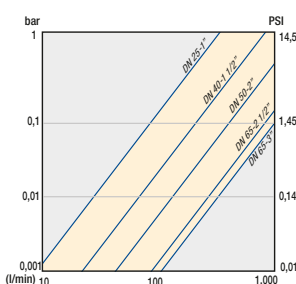


"T" Model

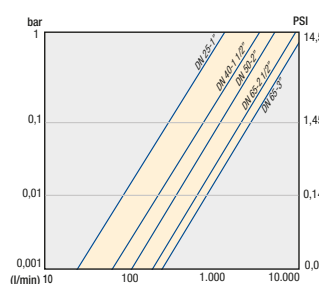

"T" Model

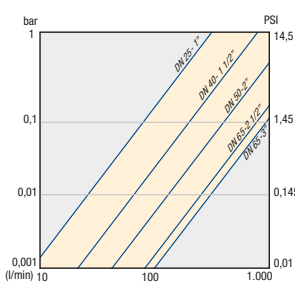


COMPONENTS

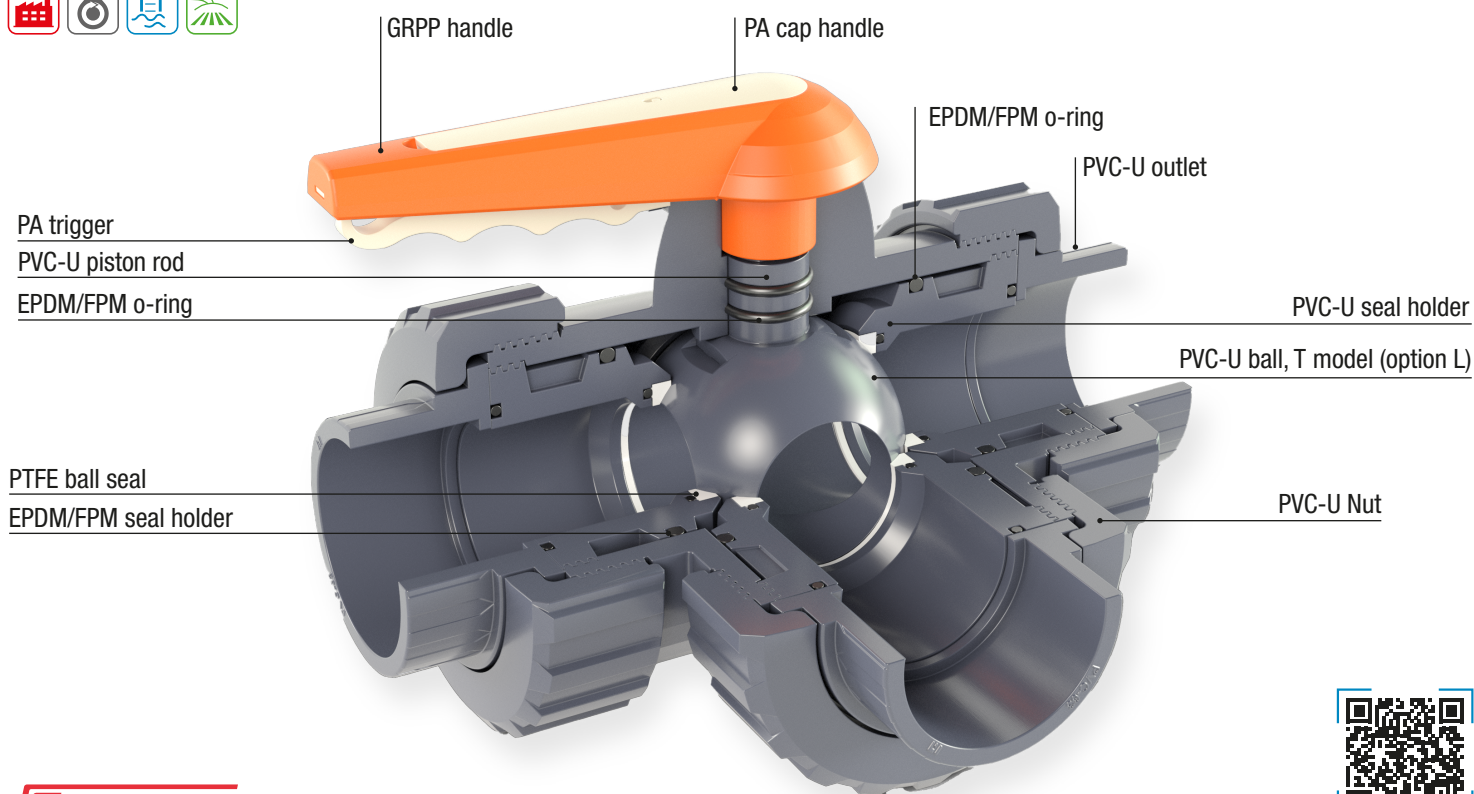

Security
3-way ball valve


ASSEMBLY INSTRUCTIONS

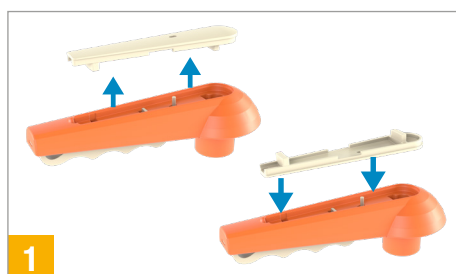

1. Remove the handle cap, turn it and fit it back again so that the handle becomes a tool for adjusting the tightening of the seal carrier.



2. Align the handle pins with the seal carrier notches.

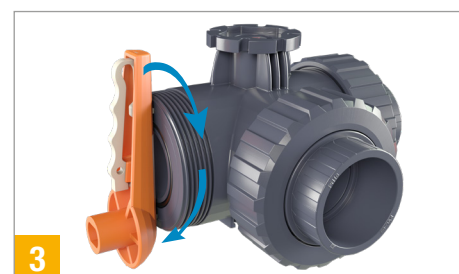


3. Turn the handle in the desired direction to increase or decrease the valve operating torque.

FLOW INDICATOR ON MANUAL MODEL



"L" Model

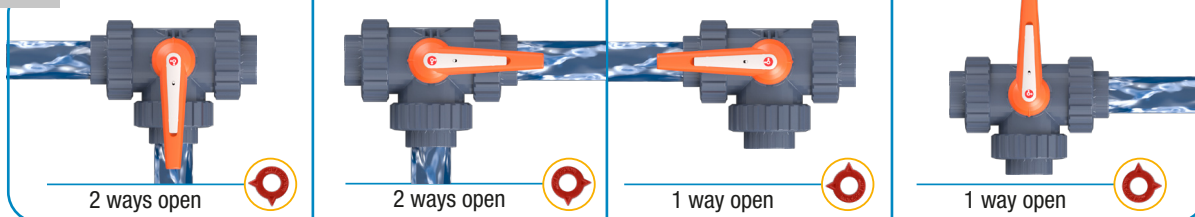

"T" Model

