




## 'Basic' ball valves

# Female threaded outlet - battery back up - PTFE ITEM 253

| REFERENCE | DESCRIPTION                                  | Net weight | Volumen (m <sup>3</sup> ) | Gross weight | Unidades lote |
|-----------|----------------------------------------------|------------|---------------------------|--------------|---------------|
| 1011209   | BALL V. W/220vELEC ACT,BAT B/U,F THR. 1/2"   | 1,754      | 0,01553                   | 1,994        | 1             |
| 1011210   | BALL V. W/220vELEC ACT,BAT B/U,F THR. 3/4"   | 1,794      | 0,02244                   | 2,334        | 1             |
| 1011211   | BALL V. W/220vELEC ACT,BAT B/U,F THR. 1"     | 1,915      | 0,03129                   | 2,475        | 1             |
| 1011212   | BALL V. W/220vELEC ACT,BAT B/U,F THR. 1 1/4" | 2,14       | 0,03129                   | 2,7          | 1             |
| 1011213   | BALL V. W/220vELEC ACT,BAT B/U,F THR. 1 1/2" | 2,416      | 0,03129                   | 2,976        | 1             |
| 1011214   | BALL V. W/220vELEC ACT,BAT B/U,F THR. 2"     | 3,304      | 0,03648                   | 4,004        | 1             |
| 1011215   | BALL V. W/220vELEC ACT,BAT B/U,F THR. 2 1/2" | 4,939      | 0,04460                   | 5,769        | 1             |
| 1011216   | BALL V. W/220vELEC ACT,BAT B/U,F THR. 3"     | 6,435      | 0,04460                   | 7,295        | 1             |
| 1011217   | BALL V. W/220vELEC ACT,BAT B/U,F THR. 4"     | 8,674      | 0,04460                   | 9,514        | 1             |



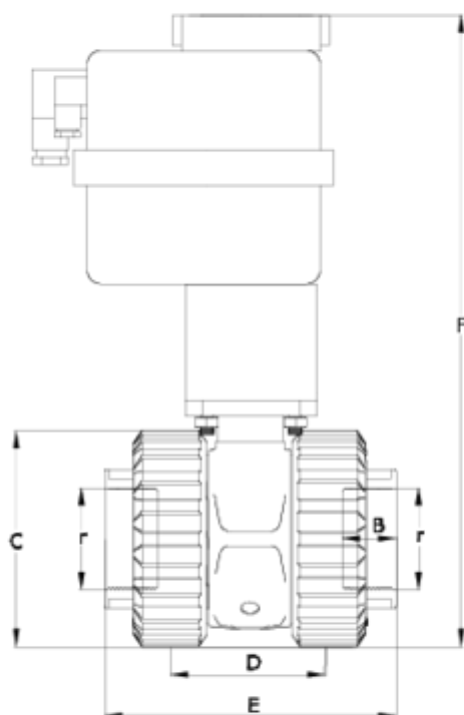



| CÓDIGO | Tamaño | Peso (g) | DN  | Actuador | B  | C   | D   | E   | F   | Actuador) | PN   | ROSCA |
|--------|--------|----------|-----|----------|----|-----|-----|-----|-----|-----------|------|-------|
| 11209  | 1/2"   | 1754     | 15  | S20      | 17 | 52  | 47  | 91  | 227 | 177       | PN16 | BSP   |
| 11210  | 3/4"   | 1794     | 20  | S20      | 20 | 59  | 51  | 101 | 232 | 177       | PN16 | BSP   |
| 11211  | 1"     | 1915     | 25  | S20      | 23 | 70  | 66  | 120 | 243 | 177       | PN16 | BSP   |
| 11212  | 1 1/4" | 2140     | 32  | S20      | 26 | 84  | 72  | 134 | 265 | 177       | PN16 | BSP   |
| 11213  | 1 1/2" | 2416     | 40  | S20      | 33 | 99  | 77  | 153 | 282 | 177       | PN16 | BSP   |
| 11214  | 2"     | 3304     | 50  | S20      | 29 | 121 | 90  | 161 | 352 | 177       | PN16 | BSP   |
| 11215  | 2 1/2" | 4939     | 65  | S35      | 33 | 151 | 121 | 204 | 426 | 177       | PN10 | BSP   |
| 11216  | 3"     | 6435     | 80  | S55      | 36 | 175 | 141 | 234 | 450 | 177       | PN10 | BSP   |
| 11217  | 4"     | 8674     | 100 | S55      | 42 | 210 | 155 | 267 | 477 | 177       | PN10 | BSP   |



Pol. Ind. Plá Vallonga,  
c/ Agua, 28  
03006 ALICANTE (España)



+34 965 11 42 82



+34 965 11 48 62



tecnicocomercial@hidroten.es



Technical &  
Commercial Service  
+ 34 966 105 888



www.hidroten.es



## Product Documents



## Product Certificates



## Company Certificates



Pol. Ind. Plá Vallonga,  
c/ Agua, 28  
03006 ALICANTE (España)



+34 965 11 42 82



+34 965 11 48 62



tecnicocomercial@hidroten.es



Technical &  
Commercial Service  
+ 34 966 105 888



www.hidroten.es