




PVC check valves (with spring)

## Thermofusion outlet - EPDM seal

### ITEM 506



REFERENCE	DESCRIPTION	Net weight	Volumen (m <sup>3</sup> )	Gross weight	Unidades lote
1016041	PVC CHECK V. (W/SPR), THERMO O.20-20	0,142	0,01553	5,84	40
1016042	PVC CHECK V. (W/SPR), THERMO O.25-25	0,199	0,01553	6,92	40
1016043	PVC CHECK V. (W/SPR), THERMO O.32-32	0,344	0,02244	9,27	30
1016044	PVC CHECK V. (W/SPR), THERMO O.40-40	0,473	0,02244	9,4	20
1016045	PVC CHECK V. (W/SPR), THERMO O.50-50	0,749817	0,03682	9,547	12
1016046	PVC CHECK V. (W/SPR), THERMO O.63-63	1,141	0,04879	11,9853	10
1016047	PVC CHECK V. (W/SPR), THERMO O.75-75	2,406	0,03129	9,4	4
1016048	PVC CHECK V. (W/SPR), THERMO O.90-90	3,702	0,03129	7,76	2

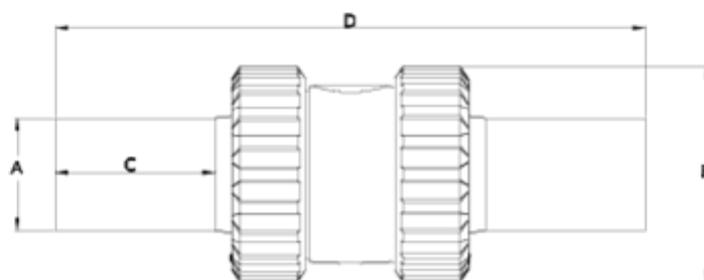

## ITEM 506 | Thermofusion outlet - EPDM seal

Código EPDM	A	Peso	B	C	D	PN	MEDIDA
16041	20	148	52	62	218	PN16	MÉTRICO
16042	25	190	59	62	220	PN16	MÉTRICO
16043	32	301	69	46	220	PN16	MÉTRICO
16044	40	493	85	64	259	PN16	MÉTRICO
16045	50	711	99	79	287	PN16	MÉTRICO
16046	63	1169	116	89	274	PN16	MÉTRICO
16047	75	2683	150	91	322	PN10	MÉTRICO
16048	90	4323	178	100	383	PN10	MÉTRICO



## Product Documents



## Product Certificates

## Company Certificates

