



## Vannes à boisseau 'Basic'


# Sortie taraudée, moteur pneumatique double effet - PFTE

## ITEM 255



RÉFÉRENCE	DESCRIPTION	Poids net	Volume (m <sup>3</sup> )	Poids brut	Unités par lot
1011229	V.SHER. PNEUMAT. D/EFFET S/TAR. 1/2"	2,354	0,01553	2,594	1
1011230	V.SHER. PNEUMAT. D/EFFET S/TAR. 3/4"	2,394	0,00891	2,5814	1
1011231	V.SHER. PNEUMAT. D/EFFET S/TAR. 1"	2,515	0,03129	3,088	1
1011232	V.SHER. PNEUMAT. D/EFFET S/TAR. 1 1/4"	2,74	0,03129	3,3	1
1011233	V.SHER. PNEUMAT. D/EFFET S/TAR. 1 1/2"	3,016	0,03129	3,576	1
1011234	V.SHER. PNEUMAT. D/EFFET S/TAR. 2"	3,2923	0,01553	3,619	1
1011235	V.SHER. PNEUMAT. D/EFFET S/TAR. 2 1/2"	7,463	0,04460	8,157	1
1011236	V.SHER. PNEUMAT. D/EFFET S/TAR. 3"	8,686	0,04460	9,38	1
1011237	V.SHER. PNEUMAT. D/EFFET S/TAR. 4"	8,674	0,04460	9,514	1



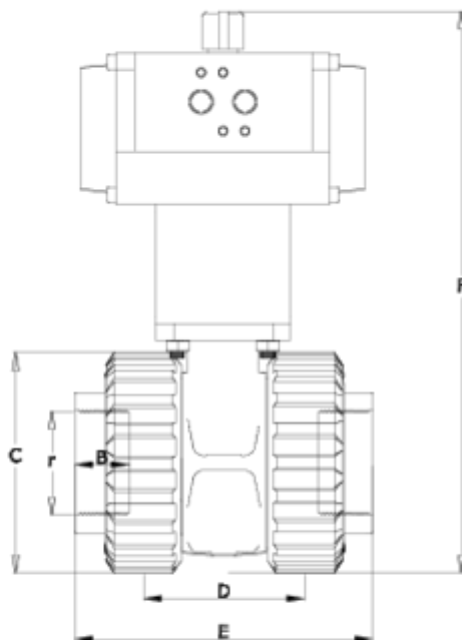

## ITEM 255 | Sortie taraudée, moteur pneumatique double effet - PTFE

CÓDIGO	r	PESO (g)	DN	Actuador	B	C	D	E	F	G	PN	TIPO ROSCA
11229	1/2"	2354	15	H050DE	17	52	47	91	211	138	PN16	BSP
11230	3/4"	2394	20	H050DE	20	59	51	101	219	138	PN16	BSP
11231	1"	2515	25	H050DE	23	70	66	120	230	138	PN16	BSP
11232	1 1/4"	2740	32	H050DE	26	84	72	134	249	138	PN16	BSP
11233	1 1/2"	3016	40	H050DE	33	99	77	153	267	138	PN16	BSP
11234	2"	4204	50	H050DE	29	121	90	161	352	138	PN16	BSP
11235	2 1/2"	5939	65	H075DE	33	151	121	204	426	210	PN10	BSP
11236	3"	7136	80	H075DE	36	175	141	234	450	210	PN10	BSP
11237	4"	8674	100	H075DE	42	210	155	267	477	210	PN10	BSP





## Documentation Produit



## Certifications de produits



## Certificats d'entreprise



Pol. Ind. Plá Vallonga,  
c/ Agua, 28  
03006 ALICANTE (España)



+34 965 11 42 82



+34 965 11 48 62



tecnicocomercial@hidroten.es



Service d'Attention  
Technique Commerciale  
+34 966 105 888



www.hidroten.es